

Miniature Compression Force Sensor K-13/K-13B with Rated Force from 0.01 ... 100 kN



Data sheet




Performance Features

- Miniature sensor for press-in force survey
- TEDS (Transducer Electronic Data Sheet) Standard IEEE 1451.4 (optional)
- K-13B with integrated overload protection
- Simple handling and assembly
- Stainless steel
- Level of protection IP65 [≤ 50 N; IP60]
- Long-term stability
- Special versions on request

Application

- Equipment engineering
- Fully automated machining centres
- Measuring and control devices
- Materials testing machines
- Tool engineering
- Special mechanical engineering

Dimensions in mm

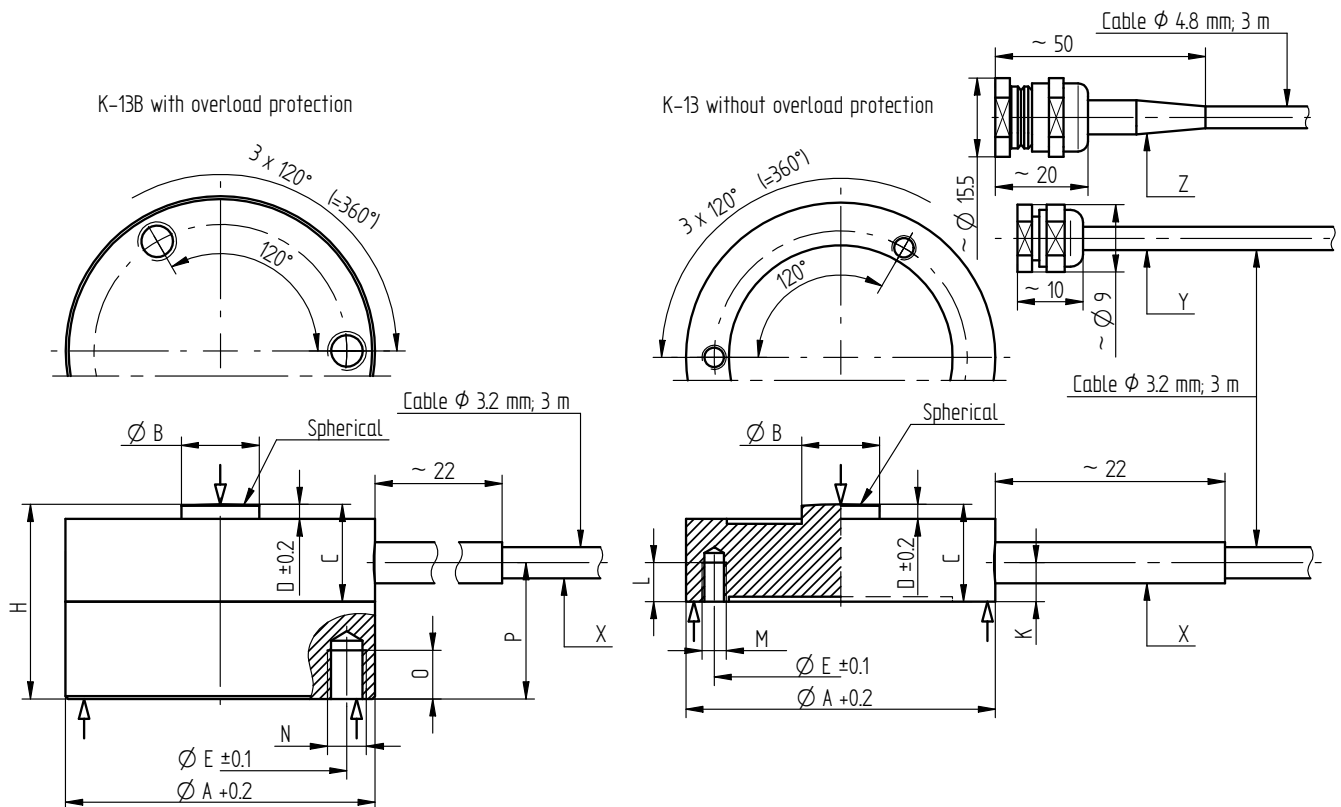

Article-No. K-13B	Rated Force [kN]	Dimensions [mm]												Overload Protection	Weight [kg]
		ØA	ØB	C	D	ØE	H	N	O	P	X	Y	Z		
103789	0.01	32	8	10	1.5	26	20	M4	5	14	X	-	-	5 x	0.3
103790	0.02														
102353	0.05														
101046	0.1														
100101	0.2														
100102	0.5														
100103	1														
100104	2	39	11	16	2	32	24	M3	5	12.5	-	X	-	3 x	0.4
100105	5														
100106	10														
100107	20	52	15	25	3	42	40	M4	5	25	-	-	X	3 x	0.7
100108	50	79	20	39	5	65	50	M5	6	21	-	-	X	3 x	1.7

Article-No. K-13	Rated Force [kN]	Dimensions [mm]											Weight [kg]
		ØA	ØB	C	D	ØE	K	L	M	X	Y	Z	
103787	0.01	32	8	10	1.5	26	4	4	M2.5	X	-	-	0.2
103788	0.02												
102352	0.05												
102718	0.1												
100092	0.2												
100093	0.5												
100094	1												
100095	2												
100096	5												
100097	10												

Article-No. K-13	Rated Force [kN]	Dimensions [mm]											Weight [kg]
		ØA	ØB	C	D	ØE	K	L	M	X	Y	Z	
100098	20	39	11	16	2	32	4.5	6	M3	-	X	-	0.3
100099	50	52	15	25	3	42	10	6	M4	-	-	X	0.5
100100	100	79	20	39	5	65	10	6	M5	-	-	X	1.2

Connection Assignment

Electrical connection

Excitation (-)	Green	●
Excitation (+)	Brown	●
Signal (+)	Yellow	●
Signal (-)	White	○
Control signal or TEDS (option)	Gray	●
Shielding	Shield	⊕

Technical Data acc. to VDI/VDE/DKD 2638

Miniature Compression Force Sensor		K-13	K-13B
Rated force F_{nom}	kN	0.01 ... 100	
Accuracy class	% F _{nom}	0.5	
Rel. repeatability error in unchanged mounting position b_{rg}	% F _{nom}	0.2	
Relative creep	% F _{nom} /30 min	<±0.1	
Rated characteristic value C_{nom}	mV/V	1.00 [0.01 kN; 0.50] ±20 %	
Input/output resistance R_e/R_a	Ω	350	
Insulation resistance R_{is}	Ω	>2*10 ⁹	
Rated range of excitation voltage B_{U, nom}	VDC	2 ... 12 [≤0.5 kN; 2 ... 6]	2 ... 12 [≤10 kN; 2 ... 6]
Electrical connection		Cable, PVC, 3 m with free strands	
Reference temperature T_{ref}	°C	23	
Rated temperature range B_{T, nom}	°C	-10 ... 70	
Operating temperature range B_{T, G}	°C	-30 ... 80	
Storage temperature range B_{T, S}	°C	-50 ... 95	
Temperature effect on zero signal TK₀	% F _{nom} /10 K	±0.2	
Temperature effect on characteristic value TK_C	% F _{nom} /10 K	±0.2	
Maximum operating force F_G	% F _{nom}	130	
Force limit F_L	% F _{nom}	150	300
Breaking force F_B	% F _{nom}	>300	>800
Permissible oscillation stress F_{rb}	% F _{nom}	70	
Rated displacement S_{nom}	mm	<0.15	
Material		Stainless steel	
Level of protection		IP65 [≤0.05 kN; IP60]	

Options

Article-No.	Description	
100218	Control signal	100 % F_{nom}
100739	Control signal	80 % M_{nom}
106154	Control signal	50 % M_{nom}
113134	TEDS-standard IEEE 1451.4	
42828	Extended temperature range	-30 °C ... 100 °C
42829	Extended temperature range	-30 °C ... 120 °C [≥ 0.2 kN]
42830	Extended temperature range	-40 °C ... 150 °C [≥ 0.2 kN]
100896	Rated sensitivity adjustment	
103954	Calibration in kg or t	
107592	6-wire connection	

Calibrations

Article-No.	Description	
400628	Linearity diagram in accordance to factory standard	25 % steps
400170	Linearity diagram in accordance to factory standard	10 % steps
400960	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	3 steps
400652	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	5 steps
400640	Proprietary calibration acc. to DIN EN ISO 376 and DAkKS-DKD-R 3-3	8 steps
	DAkKS-Calibration / Standard on request	

Accessories

Electrical Connection

Article-No.	Description
10323	Cable connector KS6 (6-pin series 581) incl. sensor mounting
10320	Cable connector KSSH15 (15-pin) incl. sensor mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Amplifiers

Examples of suitable amplifiers for the miniature compression force sensor K-13/K-13B:

LCV	GM 78	GM 40	GM 80	SI
				

Further suitable amplifiers you can find on our homepage under <https://www.lorenz-messtechnik.de/english/products/>