

Tension and Compression Force Sensor K-12 with Rated Force from 0.5 ... 1000 kN



Data sheet




Performance Features

- Sensor for tension and compression force measurement
- TEDS (Transducer Electronic Data Sheet)
Standard IEEE 1451.4 (optional)
- Simple handling and assembly
- Reliable and durable
- Long-term stability
- Level of protection IP67
- Special versions on request

Application

- Equipment engineering
- Fully automated machining centres
- Measuring and control devices
- Tension/compressive testing machines
- Tool engineering
- Special mechanical engineering

Dimensions in mm

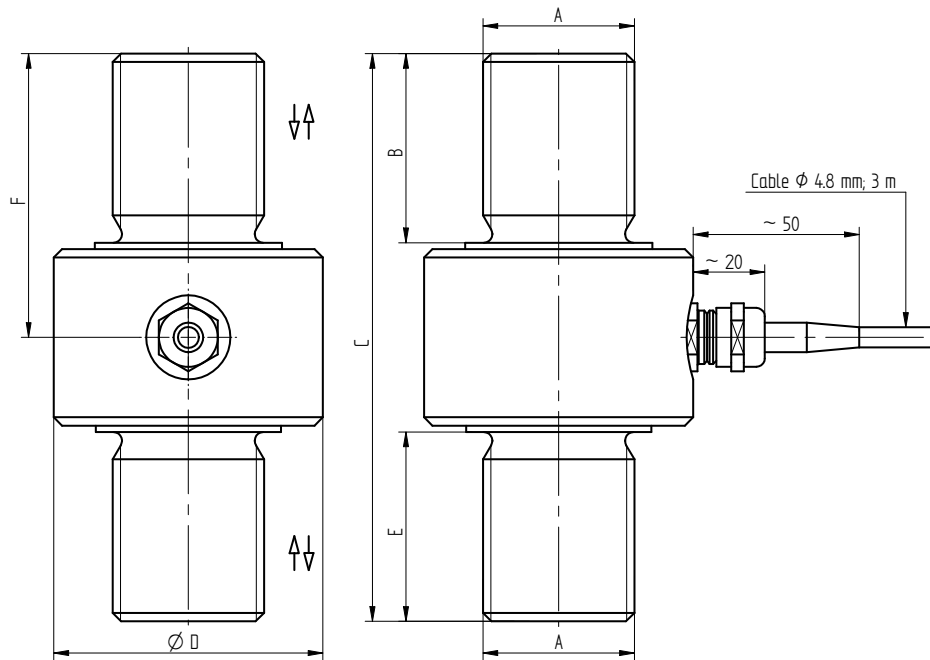

Article-No.	Rated Force [kN]	Dimensions [mm]						Weight [kg]
		A	B	C	ØD	E	F	
100474	0.5	M12	24	79	50	20	37	0.7
100473	1							
102372	2							
100472	5							
100471	10	M20x1.5	25	90	59	25	45	1.0
100470	20							
100469	50							
100468	100	M36x3	45	135	64	45	67.5	1.9
100467	200	M45x3	50	170	80	50	85	3.7
100466	500	M60x4	80	240	90	80	120	5.7
100465	1000	M100x3	110	300	130	110	150	20.1

Connection Assignment

Electrical Connection

Excitation (-)	Green	●
Excitation (+)	Brown	●
Signal (+)	Yellow	●
Signal (-)	White	○
Control signal or TEDS (option)	Gray	●
Shielding	Shield	⊖

Technical Data acc. to VDI/VDE/DKD 2638

Tension and Compression Force Sensor K-12

Rated force F_{nom}	kN	0.5	1	2	5	10	20	50	100	200	500	1000
Accuracy class compression force or tension force	% F _{nom}	0.1										
Accuracy class compression force and tension force	% F _{nom}	0.25										
Rel. repeatability error in unchanged mounting position b_{rg}	% F _{nom}	0.08										
Relative creep	% F _{nom} /30 min	<±0.06										
Rated characteristic value C_{nom}	mV/V	1.00 ±0.1 %										
Input/output resistance R_e/R_a	Ω	350										
Insulation resistance R_{is}	Ω	>2*10 ⁹										
Rated range of excitation voltage B_{U, nom}	VDC	2 ... 12										
Electrical connection		Cable, PVC, 3 m with free strands										
Reference temperature T_{ref}	°C	23										
Rated temperature range B_{T, nom}	°C	-10 ... 70										
Operating temperature range B_{T, G}	°C	-30 ... 80										
Storage temperature range B_{T, S}	°C	-50 ... 95										
Temperature effect on zero signal TK₀	% F _{nom} /10 K	±0.25										
Temperature effect on characteristic value TK_C	% F _{nom} /10 K	±0.07										
Maximum operating force F_G	% F _{nom}	130										
Force limit F_L	% F _{nom}	150										
Breaking force F_B	% F _{nom}	>300										
Permissible oscillation stress F_{rb}	% F _{nom}	70										
Lateral force resistance	% F _{nom}	50										
Rated displacement S_{nom}	mm	<0.1										
Preferential direction		Tension direction										
Material		Stainless steel										
Level of protection		IP67										


Options

Article-No.	Description	
100218	Control signal	100 % F _{nom}
100739	Control signal	80 % M _{nom}
106154	Control signal	50 % M _{nom}
113134	TEDS-standard IEEE 1451.4	
42828	Extended temperature range	-30 °C ... 100 °C
42829	Extended temperature range	-30 °C ... 120 °C [≥2 kN]
42830	Extended temperature range	-40 °C ... 150 °C [≥2 kN]
103954	Calibration in kg or t	
107592	6-wire connection	

Calibrations

Article-No.	Description	
400628	Linearity diagram in accordance to factory standard	25 % steps
400170	Linearity diagram in accordance to factory standard	10 % steps
400960	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	3 steps
400652	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	5 steps
400640	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	8 steps
	DAkkS-Calibration / Standard on request	

Dimensions of Joint Eye Type EF in mm

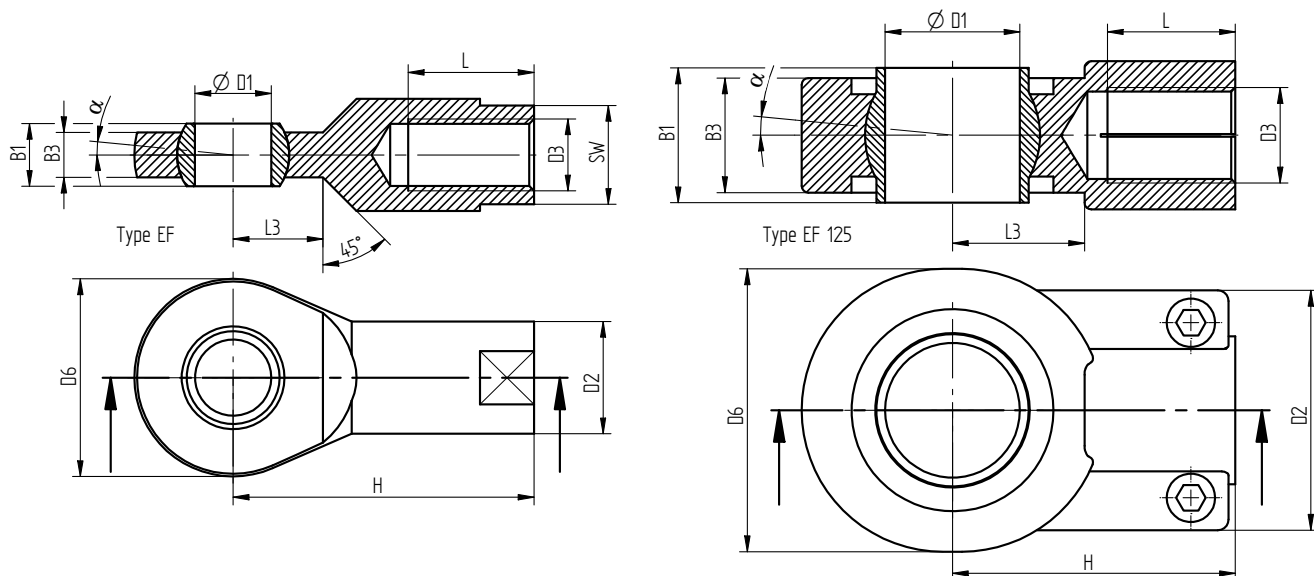

Article-No.	Type - EF	Dimensions [mm]											Weight [kg]	Load rating stat. C ₀ [N]
		B1	B3	ØD1	D2	D3	D6	H	L	L3	α	SW		
40585	EF 12	10	7	12	19	M12	32	50	22	15	5°	17	0.09	28000
41433	EF 20	16	12	20	28	M20x1.5	51	77	33	23	4.5°	24	0.29	76700
40588	EF 35	25	20	35	51	M36x3	82	125	61	38	3.5°	41	1.23	180800
40591	EF 45	32	25	45	67	M45x3	102	165	76	50	4°	55	3.09	276200
40218	EF 60	44	36	60	84	M60x4	135	225	103	70	3.5°	70	7.30	532100
47925	EF 125	125	103	125	200	M100x3	265	260	113	120	4°	-	43.00	1144000

Tolerances for Type EF

ØD1		ΔD1		ΔB1		ΔH	
>	≤	Tolerance		Tolerance		Tolerance	
5	18	0	-0.008	0	-0.12	+1.2	-1.2
18	30	0	-0.010	0	-0.12	+1.7	-1.7
30	50	0	-0.012	0	-0.12	+2.1	-2.1
50	80	0	-0.015	0	-0.15	+2.7	-2.7
-	125	+0.040	0	0	-0.40	+3.4	-3.4

Electrical Connection

Article-No.	Description
10323	Cable connector KS6 (6-pin series 581) incl. sensor mounting
10320	Cable connector KSSH15 (15-pin) incl. sensor mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Amplifiers

Examples of suitable amplifiers for the tension and compression force sensor K-12:

LCV	GM 78	GM 40	GM 80	SI
				

Further suitable amplifiers you can find on our homepage under <https://www.lorenz-messtechnik.de/english/products/>